MAVEN

(Managing Automated Vehicles Enhances Network)

V2X communications

for vehicle automation and data fusion


Michele Rondinone Hyundai Motor Europe Technical Center GmbH, Germany

> MAVEN final event, ITS Europe Congress 6.6.2019 Helmond, The Netherlands





Use cases overview

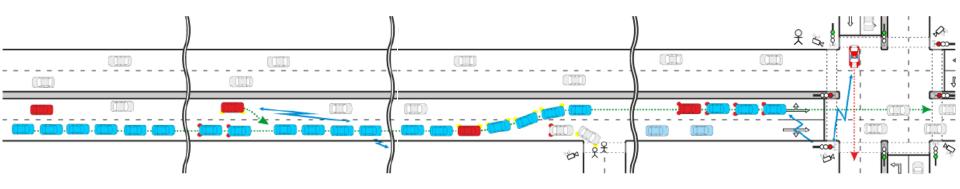


I2V interactions

- V2I "explicit" probing + I2V speed/lane advisory + V2I feedbacks on compliance to advisories
- Traffic controllers optimization
 - ✓ Signal optimization, priority management, queue estimation, green wave
- Platoon management
 - ✓ Forming, joining, travelling in, leaving, breaking a platoon
- Inclusion of conventional traffic and VRUs
 - Detection/reaction in presence of non-coop cars & VRUs





MAVEN I2V interactions

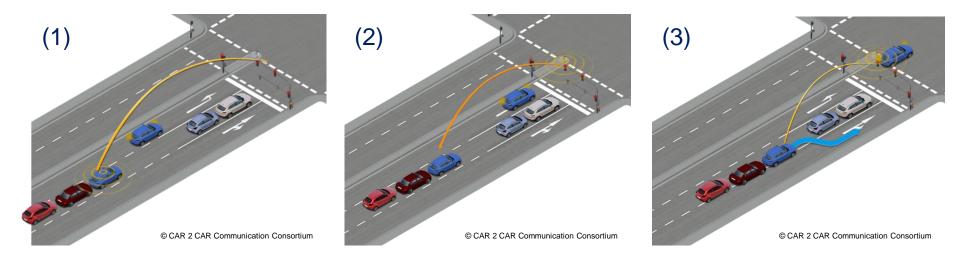

V2I explicit traffic probing (1)


MAVEN

000

- CAVs and/or platoons transmits planned route, desired speed, platoon characteristics, etc.
- Traffic light controller signal timing re-optimization and I2V advisories (2)
 - Based on rx info/calculations, infra transmits speed /lane change advisories
- V2I feedbacks on compliance to advisories (3)
 - CAVs and/or platoons communicate if advisories can be executed
 - If yes, traffic light controller "freezes" signal timing optimization



V2X for I2V interactions (1)

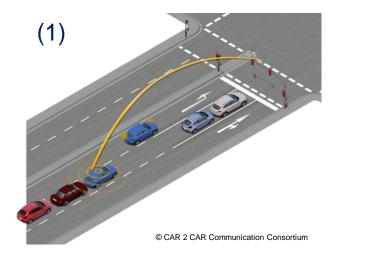

Ext CAM on SCH0		ItsPduHeader (as in [ETSI EN 302 637-2])	
	CoopAwareness		GenerationDeltaTime (as in [ETSI EN 302 637-2])
		CAMParameters	BasicContainer (as in [ETSI EN 302 637-2], includes car position)
			HighFrequency Container = BasicVehicleContainerHighFrequency (as in [ETSI EN 302 637-2], includes dynamic info)
			LowFrequencyContainer = BasicVehicleContainerLowFrequency (as in [ETSI EN 302 637-2])
			SpecialVehicleContainer = MavenAutomatedVehicleContainer


Message for V2I traffic probing

- Backward-compatible extension of CAM (on Day1 SCH0)
- MavenAutomatedVehicleContainer includes info needed by TLC
 - CAV route at intersection (e.g. Ingress/egress lane)
 - ✓ Distance to preceding/following vehicle
 - Platoon id (tx by platoon leader if platoon is present)
 - Platoon participants (tx by platoon leader if platoon is present)
 - Desired platoon speed (tx by platoon leader if platoon is present)





V2X for I2V interactions (2)

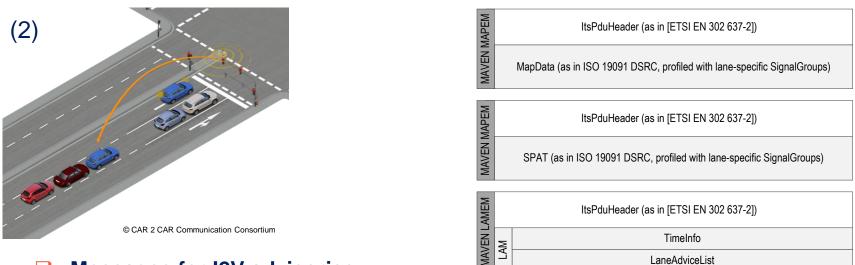

Messages for I2V advisories

Lane-specific GLOSA

Suggests speed to be adopted on a given lane, calculated based on queue estimation

✓ Use current standard SPATEM/MAPEM profiled to allocate lane-specific signal groups when needed


Lane change advice message

- Suggests the lane a CAVor platoon should change to at an intersection
- Indicates target lane, distance to stop line, and time for starting the maneuver
- ✓ Uses a newly defined Lane Advisory Message (LAM) including individual advices





V2X for I2V interactions (3)

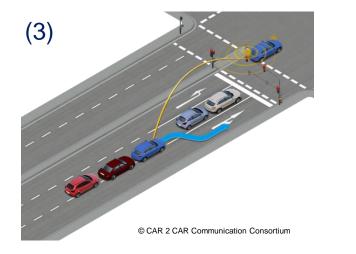

Ext CAM on SCH0	ItsPduHeader (as in [ETSI EN 302 637-2])				
	CoopAwareness		GenerationDeltaTime (as in [ETSI EN 302 637-2])		
		CAMParameters	BasicContainer (as in [ETSI EN 302 637-2], includes car position)		
			HighFrequency Container = BasicVehicleContainerHighFrequency (as in [ETSI EN 302 637-2], includes dynamic info)		
			LowFrequencyContainer = BasicVehicleContainerLowFrequency (as in [ETSI EN 302 637-2])		
			SpecialVehicleContainer = MavenAutomatedVehicleContainer		


Message for V2I feedbacks on compliance to advisories (3)


- Backward compatible extension of CAM message (on Day1 SCH0)
- MavenAutomatedVehicleContainer includes feedback needed by TLC
 - ✓ Real-time Acknowledgment on whether the GLOSA is being applied by the CAV
 - ✓ Real-time Acknowledgment on whether the lane change is being executed by the CAV





MAVEN platooning

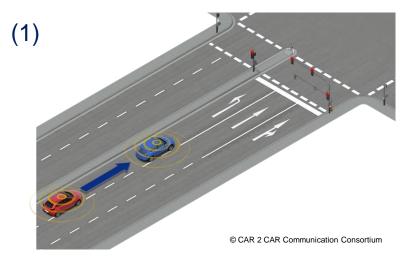

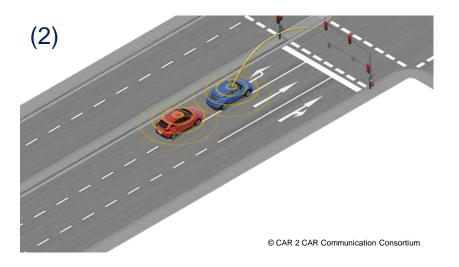

Mix between distributed and centralized approach

- Based on common distributed algorithm and V2V exchanged info, individual vehicles form platoons and manage their operation (joining, leaving, etc.) (1)
- Yet, platoon leader has the central role of communicating platoon features to the infra for explicit traffic probing (2)

Use of 2 parallel ITS G5 channels

- One for advertising vehicle and/or platoon characteristics to other vehicles or infra
- The other, to convey more frequent platoon control and management info






V2X for MAVEN platooning



	ItsPduHeader (as in [ETSI EN 302 637-2])					
	GenerationDeltaTime (as in [ETSI EN 302 637-2])					
CoopAwareness	CAMParameters	BasicContainer (as in [ETSI EN 302 637-2], includes car position)				
		HighFrequency Container = BasicVehicleContainerHighFrequency (as in [ETSI EN 302 637-2], includes dynamic info)				
		LowFrequencyContainer = BasicVehicleContainerLowFrequency (as in [ETSI EN 302 637-2])				
		SpecialVehicleContainer = MavenAutomatedVehicleContainer				



Message for platooning initialization

- Backward compatible extension of CAM message (on Day1 SCH0)
- MavenAutomatedVehicleContainer carries info for CAVs to detect opportunities for building/joining a platoon (e.g. Based on same expected route, desired speed, etc)


Message for platooning management and control

- CAM tx on a parallel SCH with higher frequency [fixed 10Hz]
- Carries limited set of info
 - for platoon control (e.g. Planned path, position, speed, acceleration, heading)
 - for platoon management: joining, brake-up, termination (e.g. flags representing the vehicle status in the platoon and used by the platoon logic)





Inclusion of conventional traffic and VRUs

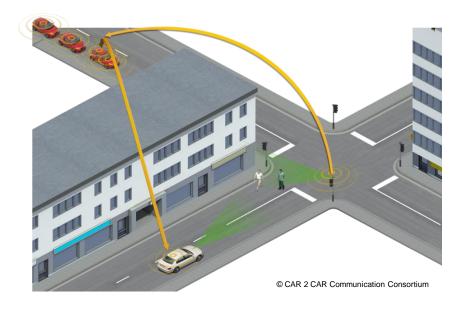


□ Use of collective perception for improved detection and reaction

- Both CAVs and infra can detect and share info about non-cooperative road users
- Improved awareness used to adapt CAV maneuver/path planning for increased safety
- Isolated CAVs or CAVs in platoon keep monitoring the environment and control the system all the time to possibly undertake emergency (automated) reactions






V2X for inclusion of conventional traffic & VRUs



	ItsPduHeader (as in [ETSI EN 102 894-2])						
	CollectivePerception		GenerationDeltaTime (as in [ETSI EN 302 637-2])				
CPM		eters	OriginatingStationContainer				
		CPMParameters	SensorInformationContainer				
		CPMI	PerceivedObjectContainer				

Message for collective perception

- Adoption of Collective Perception Message (CPM) in pre-standardization at ETSI ITS (TR 103 562 and TS 103 324) and consideration at the C2C-CC
- \checkmark Active contribution to ETSI CPM standardization to accommodate MAVEN requirements
 - General restructuring of CPM to accommodate detections from RSUs
 - Definitions based on RSU-specific reference system in all containers \checkmark
 - Possibility to match detected objects to topological information transmitted in MAP messages

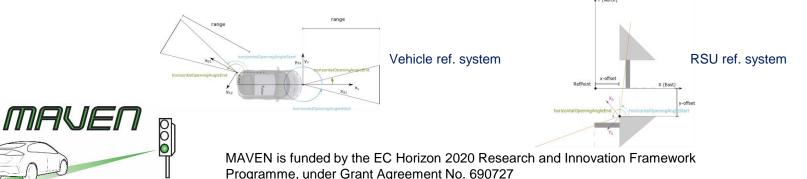



Verification schemes

Lab testing with V2X HW integration


- Target: verify V2X protocols functionality and interaction with AD SW modules
- ✓ Real V2X HW is used
- AD SW modules connected but run on lab PC (not in real car prototype)


Field testing with V2X emulation


- Target: verify AD SW functionality in reaction to V2X inputs
- ✓ AD SW & HW on real car prototype used
- V2X protocols are emulated and run as part of AD SW

Field testing with V2X HW integration*

- Target: jointly verify AD SW and V2X protocols functionality
- Both V2X and AD SW & HW on real car prototype










*Details in next presentations!



Lab testing with V2X integration

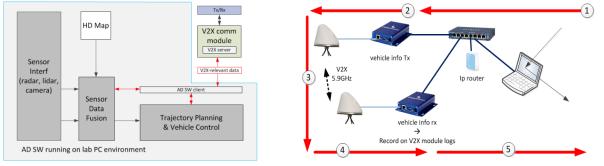

3) Transmission and reception of messages

 Decoding of V2X messages according to MAVEN protocols


1) Injection of AD data at AD SW client

MAVEN protocols


2) Coding of V2X messages according to

5) Reception of AD data at AD SW client, extraction and reuse in AD SW modules

Test setup and procedure

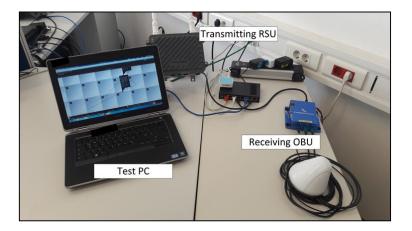

Hyundai tests

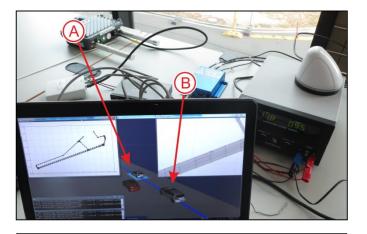


DLR tests





Field testing with V2X emulation (1)




Test setup and procedure



1) V2X data collection in real field for later



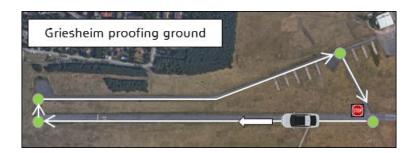

 V2X recording replay as input for AD tests on test track







Field testing with V2X emulation (2)



Distance 0	Distance 1	Distance 2	Distance 3
Speed 0	Speed 1	Speed 2	Speed 3
	81=	Lane 0 Lane 1	

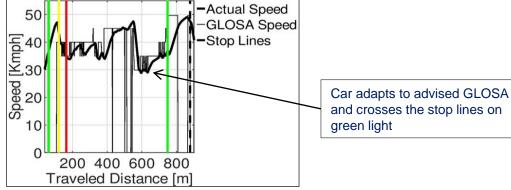

Hyundai GLOSA adaptation tests

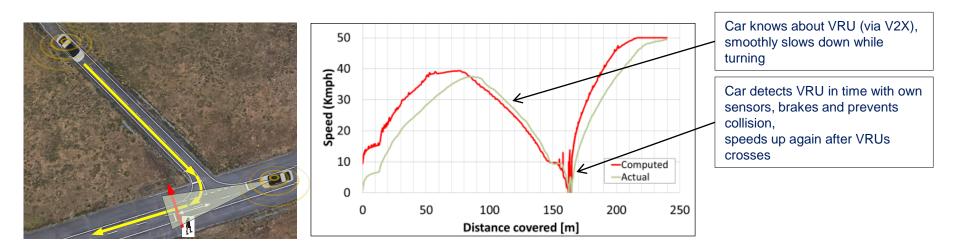

Hyundai tests on automated reaction to collective perception messages





Additional information can be found atat:

www.maven-its.eu

Do not hesitate to contact us!

Thank you!

Questions?



